



RAPID 40 S

TOUCH

*Simply Manual
and Simply Driven...*



**THE BEST FEATURES WHICH MARKED
THE SUCCESS OF RAPID 40 HAVE NOW BEEN TURNED
INTO AN ECONOMICAL AND STREAMLINED FORMULA
WHICH IS ABLE TO GUARANTEE
TOP-QUALITY PERFORMANCE AND RESULTS!**

...Simply for you!

THE S FAMILY

The S-family Rapid 40 scrubber dryers are specifically designed for an everyday use: innovative and functional design which is able to guarantee maximum ergonomics and comfort. Cutting edge features and technical equipment – 40 litres tank capacity, up to three hour running time, practical and intuitive control panel- make these machines an important point of reference in their sector. They are ideal for effective cleaning results on every kind of floor and in every kind of environment.

RAPID 40 S M 55

BATTERY OPERATED, MANUAL, EQUIPPED WITH A 21" BRUSH HEAD



Control panel

RAPID 40 S D 55

BATTERY OPERATED, WITH TRACTION, EQUIPPED WITH A 21" BRUSH HEAD



Drive motor



Rapid 40 SM 55 and SD 55 are available in two versions: a basic one and a full package one (with battery charger and batteries).

SM 55

PRODUCT IDENTIFICATION	REF. NO
RAPID 40 SM 55 TOUCH	10.0231.01
RAPID 40 SM 55 BC TOUCH	13.0231.01

SD 55

PRODUCT IDENTIFICATION	REF. NO
RAPID 40 SD 55 TOUCH	10.0232.01
RAPID 40 SD 55 BC TOUCH	13.0232.01

TECHNICAL DATASHEET

		SM	SD
Power supply			Battery 24V
Tank capacity (solution/recovery)	l		45 / 47
Cleaning width	mm		530
Squeegee width	mm		750
Installed power	W	750	1090
Driving speed	km/h	4	5
Productivity (theor./practical)	m ² /h	2120-1270	2650-1590
Running time	h	1,5	2,15
Down pressure	Kg- gr/cm ²		25,5- 16,5
Noise level	dB(A)		63
Dimensions	mm		1210x560x1040



PRACTICAL AND INTUITIVE CONTROL PANEL

All the main functions of the machine can be managed by the operator through the extremely simplified control panel which guarantees a precise control of the activities of Rapid 40.



TOUCH SYSTEM

The machine features a main sensor located in the center of the handle. When the operator touches it, a signal is sent to the electronic board: all the selected functions are immediately activated and you are ready to work. Simple, practical, safe.




EXTREME MANOEUVRABILITY

The two pivoting wheels under the frame and the short wheelbase guarantee maximum manoeuvrability, while ensuring at the same time complete control both in operation and during transport operations. In this way, Rapid 40 can operate in a perfectly agile way in any kind of environment.



HIGH PRODUCTIVITY

40-litres capacity, wide cleaning width (530 mm), running time (up to three hours for SD models) and up to 5 km/h driving speed (in the version with traction). Everything has been conceived in order to guarantee maximum productivity and to work effortlessly in environments and on surfaces which feature different dimensions.

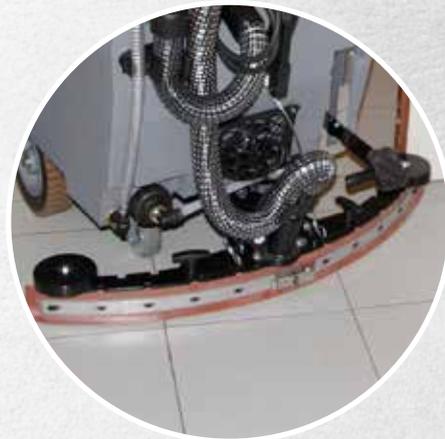

TOP PERFORMANCE!

The high-performance suction motor and the innovative, compact and adjustable squeegee system guarantee excellent drying results even on the most difficult surfaces.

STANDARD ACCESSORIES

TYPE	REF. NO.
Solution tank filling hose	30.0024.00
21" Polypropylene brush ø 0.7	40.0003.00
On board charger 24 V 5 A (*)	22.0531.00
Gel batteries set (2 pcs) 12 V 50 Ah (*)	18.0026.00
On board charger 24 V 9 A (**)	22.0519.00
Battery set (2 pcs) 12 V 76 Ah (**)	18.0000.00
Brush splashguard	24.0405.00
Front rubber blade	39.0181.00
Rear rubber blade	39.0111.00


OPTIONAL ACCESSORIES

TYPE	REF. NO.
21" Polypropylene brush ø 0.9	40.0103.00
21" Polypropylene brush ø 1.2	40.0303.00
21" Tynex brush ø 1.2 grit 80	40.0203.00
Pad holder 485 mm (for 20" pad)	40.1003.00
Set front + rear polyurethane squeegee blades	96.0055.00

* for RAPID 40 SM 55 BC TOUCH version
 ** for RAPID 40 SD 55 BC TOUCH version

RAPID 40 SM/SD

AT A GLANCE

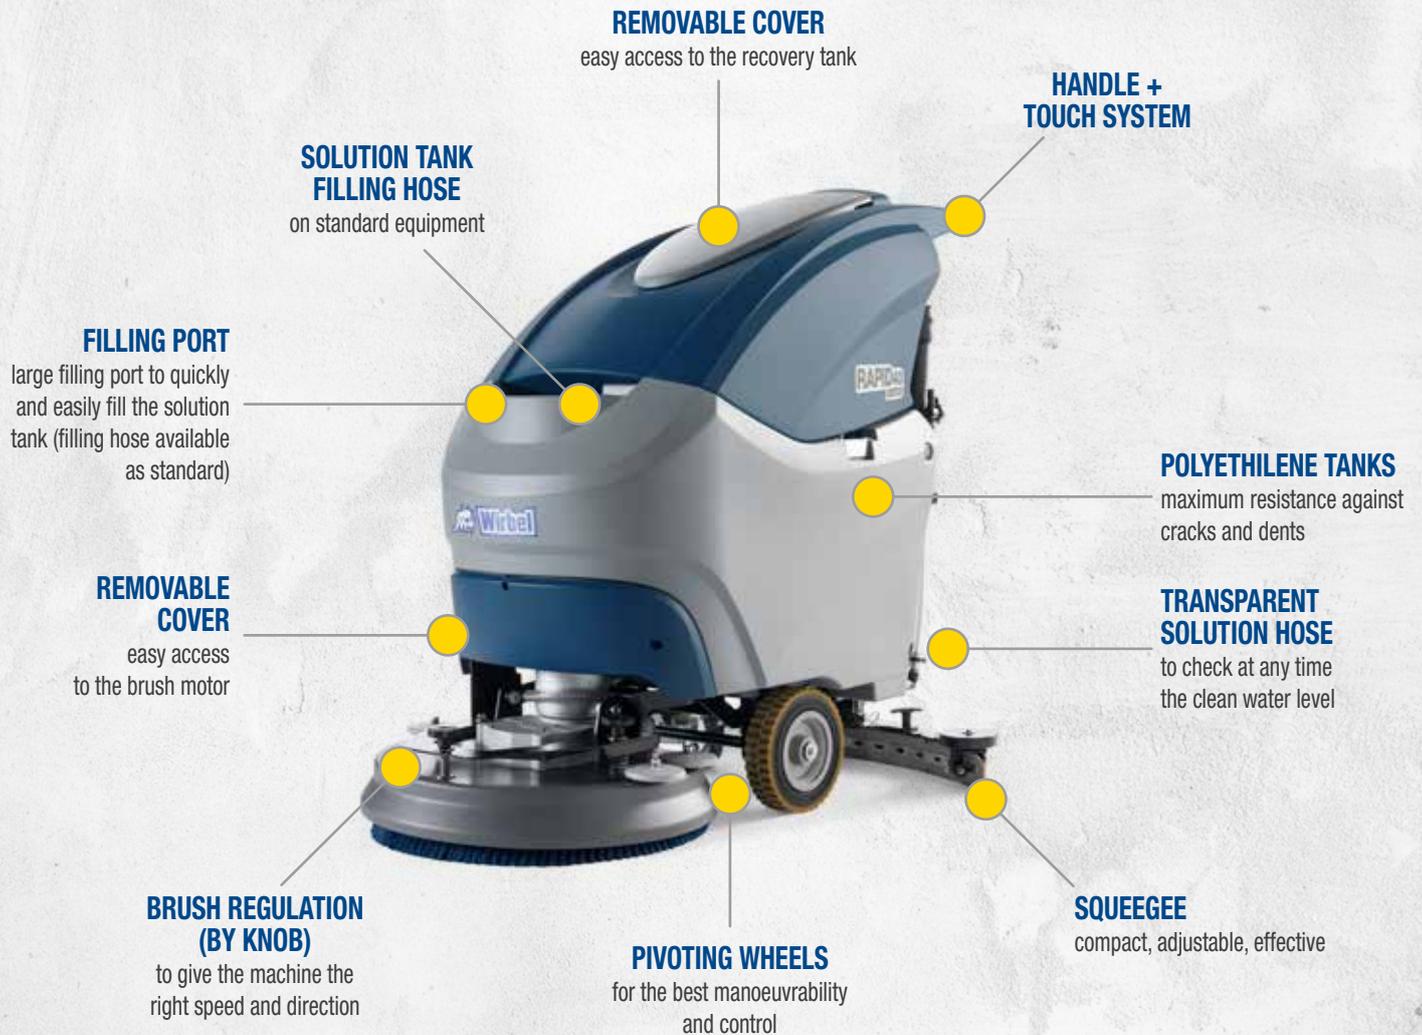

Brochure fam. Rapid 40 S Wirbel Cod. 8050327- EN -Ed.05.2017
Ghibli & Wirbel S.p.A. reserves the right to change specifications and accessories at all times.